

CAPACITORS FOR INDUCTION HEATING

FP-4-150


Highlights

- Cooling method - Conduction
- Polypropylene dielectric
- Self-healing
- Stray inductance $< 3\eta H$
- Operating frequency up to 700 KHz



Specifications


Rated Voltage Vrms	Nominal Capacitance Mfd at 1Khz	Max. current Irms	Max. power Kvar	Frequency KHz	ESR mO	Dimensions mm			Terminal Style
						B	H	L	
700	0.10	250	150	490-650	1.5	30.2	30	68	SP
	0.17	250	150	280-400	1.2	30.2	30	68	SP
	0.33	250	150	168-200	1.0	30.2	30	68	SP
600	0.66	300	150	100-160	0.8	30.2	30	68	SP
500	1.2	300	150	75-80	0.6	30.2	30	68	SP
400	2.5	400	150	58-68	0.4	30.2	30	68	SP

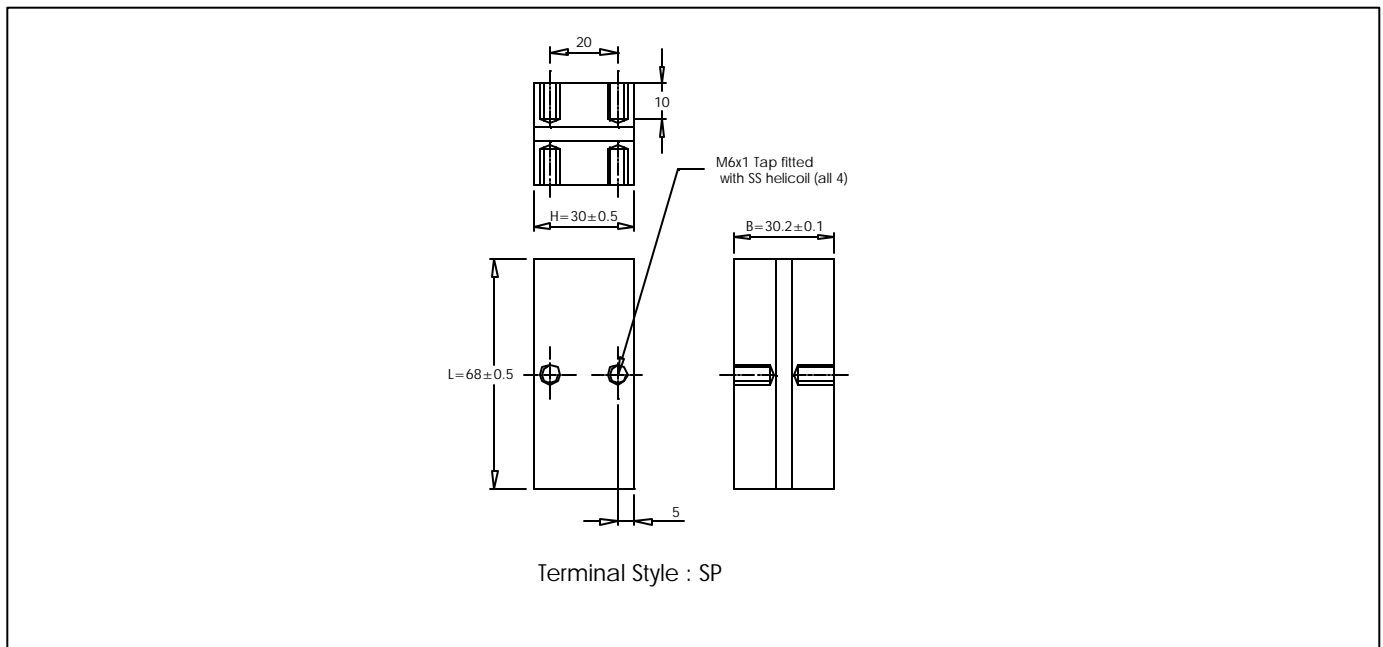

CAPACITORS FOR INDUCTION HEATING

FP-4-150


Frequency Derating

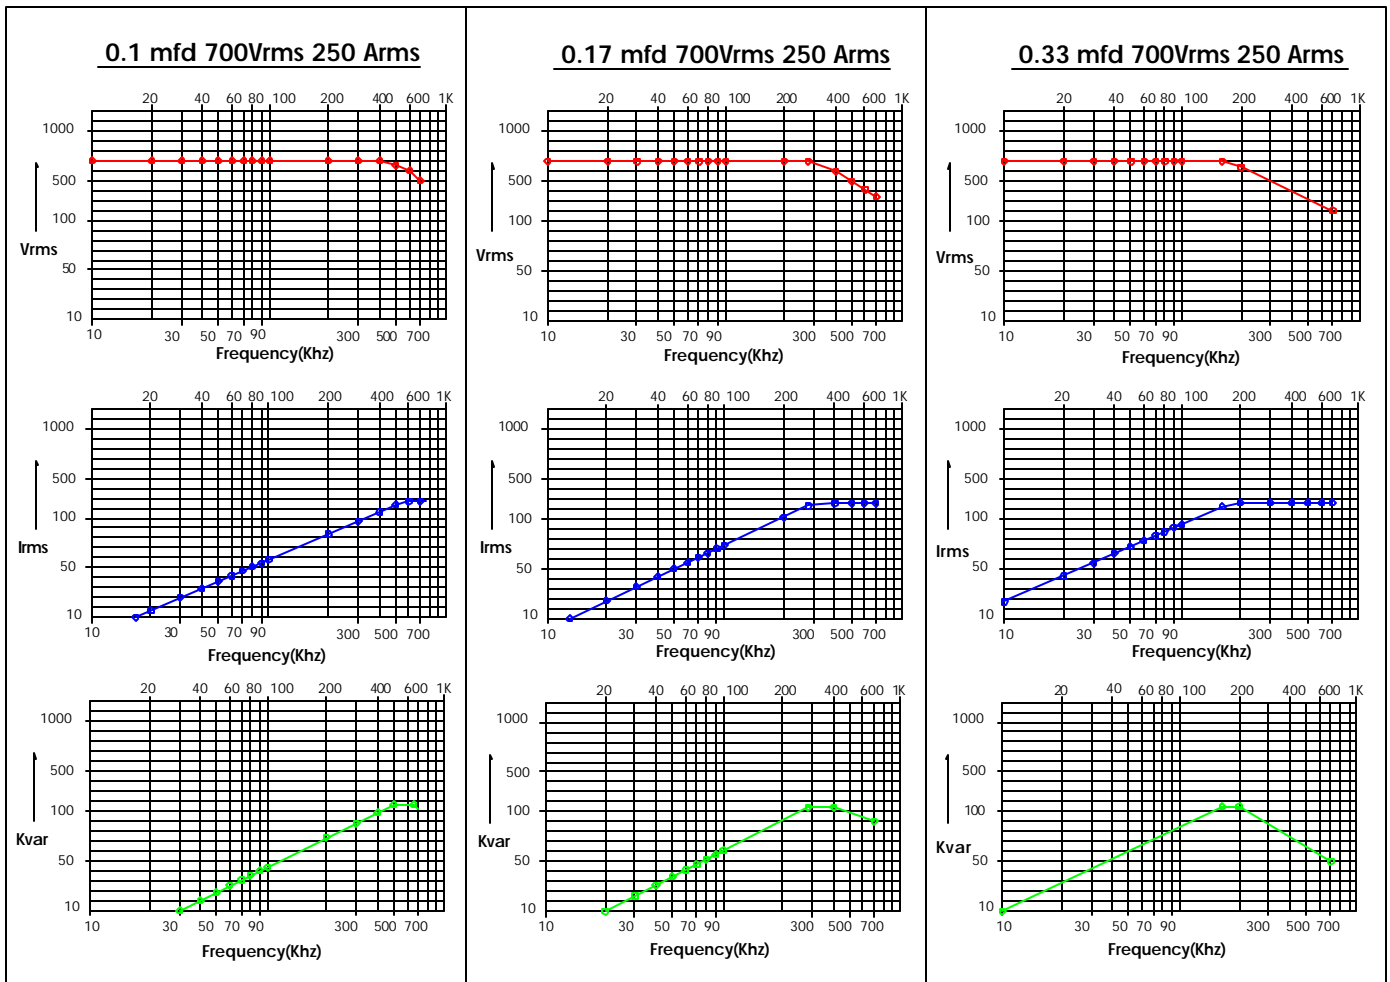

CAPACITORS FOR INDUCTION HEATING

FP-4-150

Frequency Derating

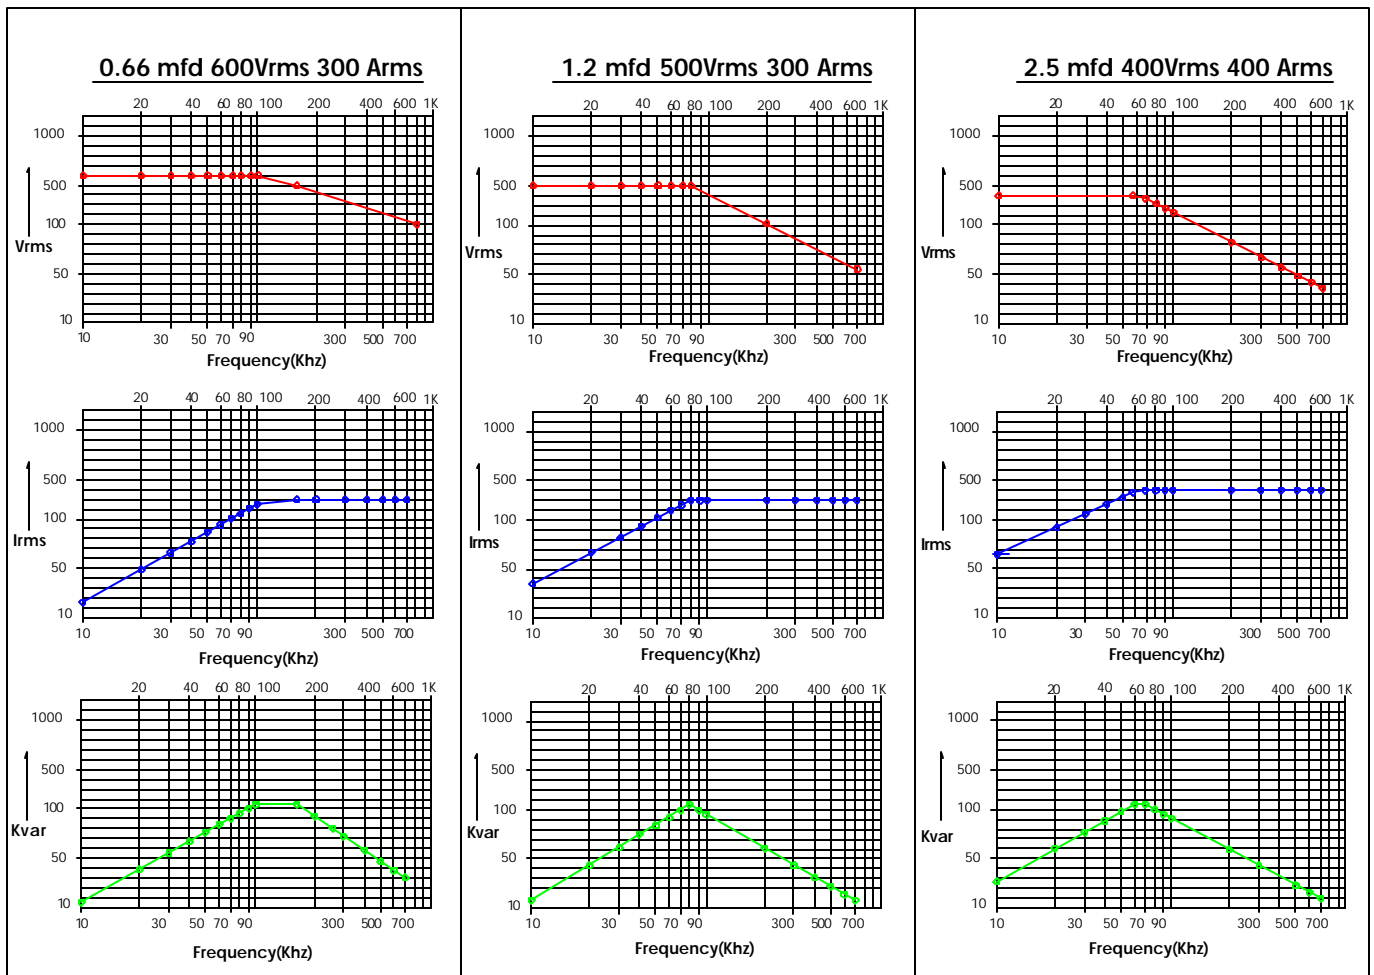

CAPACITORS FOR INDUCTION HEATING



Registered Office & Factory

34-B MIDC Industrial Estate, Satpur, Nashik 422007, India.

Phone: +91 253 – 2350533, 2350237, Fax: +91 253 – 2351682

Email: mail@alconelectronics.com Website: www.alconelectronics.com

Catalogue no . FP-4 –PDF

The specifications shown in this catalogue pertain to the current manufacturing range of the Company. The Company reserves the right to change and/or modify any part of or whole of the specifications as a result of research and development and as may be deemed necessary, without prior notice. Rights of sale reserved.