

CAPACITORS FOR INDUCTION HEATING

FP-8-300



Highlights

- Cooling method - Conduction
- Polypropylene dielectric
- Self-healing
- Stray inductance <math>< 5\eta\text{H}</math>
- Operating frequency up to 700 KHz



Specifications


Rated Voltage Vrms	Nominal Capacitance Mfd at 1Khz	Max. current Irms	Max. power Kvar	Frequency KHz	ESR mO	Dimensions mm			Terminal Style
						B	H	L	
700	0.20	500	300	495-680	1.2	30.2	60	60	4H
	0.20	500	300	495-680	1.2	30.2	66	58	2H
	0.33	500	300	280-400	1.0	30.2	60	60	4H
	0.33	500	300	280-400	1.0	30.2	66	58	2H
	0.66	500	300	140-200	0.8	30.2	60	60	4H
	0.66	500	300	140-200	0.8	30.2	66	58	2H
600	1.0	650	300	130-210	0.5	30.2	60	60	4H
	1.0	650	300	130-210	0.5	30.2	66	58	2H
	1.32	650	300	100-170	0.3	30.2	60	60	4H
	1.32	650	300	100-170	0.3	30.2	66	58	2H
500	2.4	650	300	78-97	0.2	30.2	60	60	4H
	2.4	650	300	78-97	0.2	30.2	66	58	2H
	5.0	800	300	58-65	0.1	30.2	60	60	4H

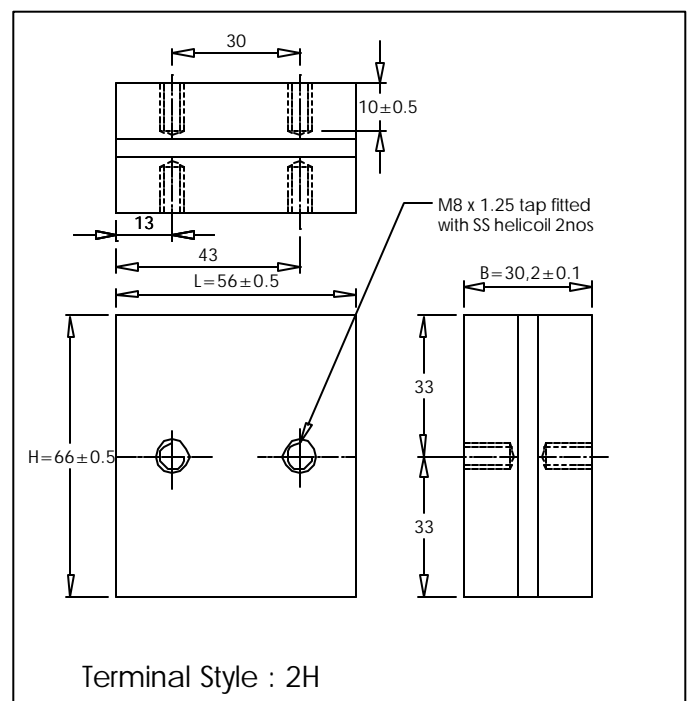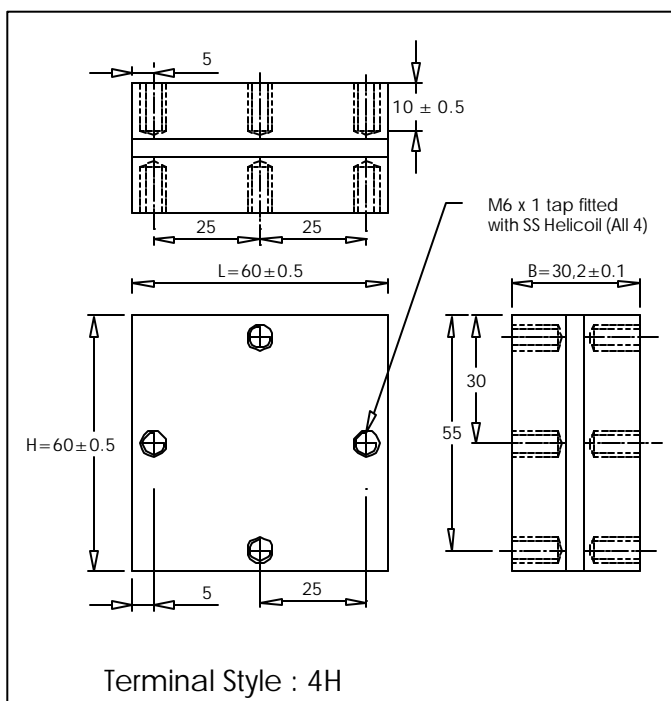

CAPACITORS FOR INDUCTION HEATING

FP-8-300

Frequency Derating

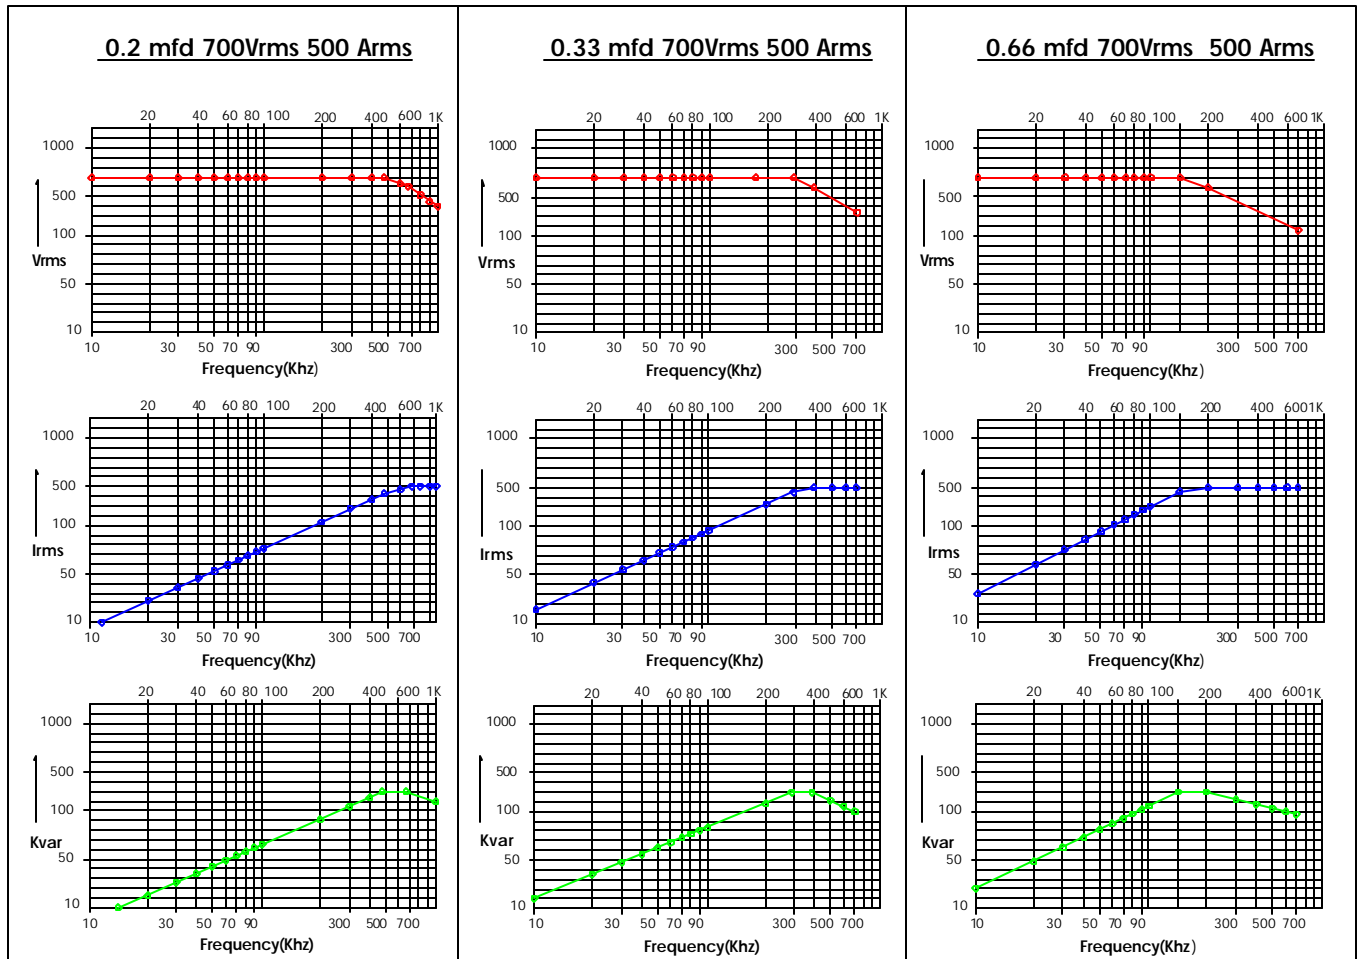

CAPACITORS FOR INDUCTION HEATING

FP-8-300

Frequency Derating

